

ONN-X2M (60 LEDs per Meter)-Running Light Specification

Introduction:

1. Energy-saving, long-life LED light with adjustable color temperature, ideal for running light applications. The luminous uniform, soft monochrome water effect standard models: red; Yellow; Green;
 2. Even soft glow; standard red/yellow/green. Custom 3-color or RGB colorful options available, sleek & delicate.
 3. Compact size saves space. Aluminum PCB optimizes heat dissipation for longer service life.
- Widely used on automation machines, machine tools and robot warning lamps.

Application:


automation equipment, machine tool equipment, robot warning lights, etc.

Warranty: 2 years

Certification: CE, RoHS

Ordering code:

ONN - X2M - B4 - 900 - RYG - 60 LEDs/m				
	1	2	3	4
1. Model No.				
2. Voltage				
3. Length				
4. Color				
6. Progress Bar				

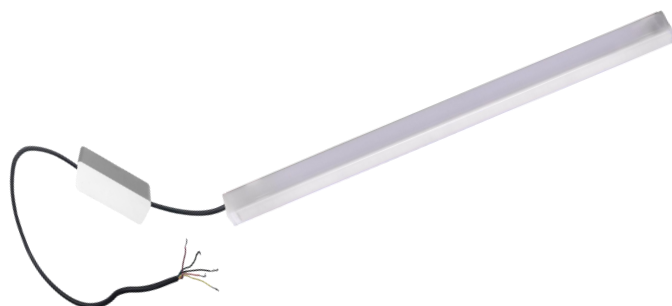


Parameter:

Input voltage(current)	DC24V
IP rating	IP65
Beam angle	110 deg
Color	Red, Yellow, Green, RYG, White
Material	PC + Aluminum PCB
Lifetime	50,000 hours
Working temperature/ humidity	-20~45°C / 10%-90%
Storage temperature/ humidity	-40~70°C / 10%-90%
Installation	Clips installation/ Recess installation


Three light-emitting surface sizes available for running lights

X2M-12.8:

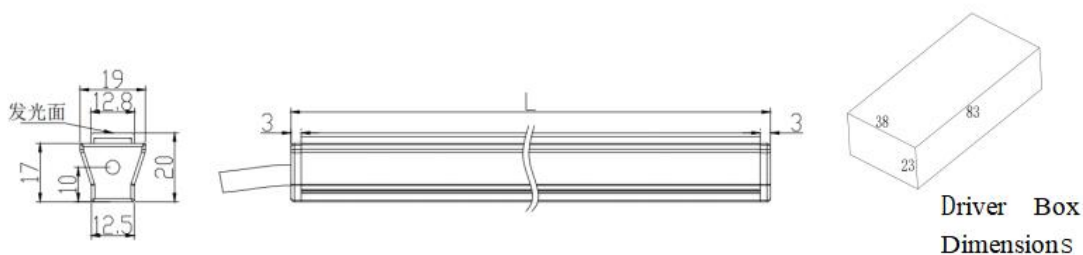


Lamp Length (L)	305	605	900	1204
Mounting Hole Length	301	601	896	1200
Light-emitting Surface Width	12.8			
Mounting Hole Width	13.8			

X2M:

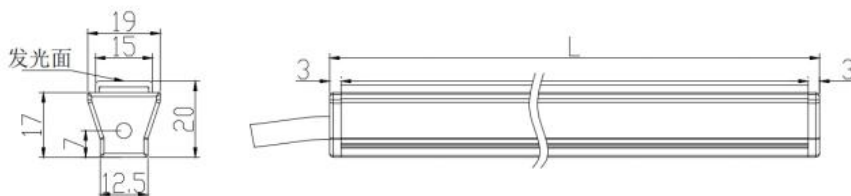

Lamp Length (L)	305	605	900	1204
Mounting Hole Length	301	601	896	1200
Light-emitting Surface Width	15			
Mounting Hole Width	16			

X2M-20:

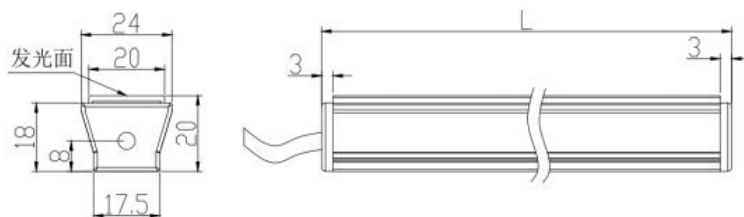

提取文字 更多

Lamp Length (L)	305	605	900	1204
Mounting Hole Length	301	601	896	1200
Light-emitting Surface Width	20			
Mounting Hole Width	21			

Color, running speed & direction adjustable pre-delivery; standard reference videos & custom effects available.

	Standard Version	Custom 1-Fast	Custom 2-Slow
Running Speed	20	10	40
Running LED Count	15	5	20
Interval LED Count	3	5	1
Standard Running Direction	(Red): A→B (Yellow): A→B (Green): A→B, customizable per customer requirements		

Default Wiring Effects for Standard Model

- Signal on red wire → Red running light
- Signal on yellow wire → Yellow running light
- Signal on green wire → Green running light
- Signals on yellow + green wires → Blue running effect
- Signals on red + yellow wires → Breathing & gradient effect
- Signals on red + green wires → Alternating yellow & green flash
- Signals on red + yellow + green wires → Rainbow scrolling effect

Package info

English Header	Column 1	Column 2
Packaging Material	Carton	Carton
Product Size (mm)	605	1204
Net Weight Per Unit (Kg)	0.12	0.20
Total Weight Per Carton (Kg)	11.1	17
Quantity Per Carton (PCS)	83	83
Outer Carton Dimension (L/W/H, mm)	660*210*200mm	1260*210*200mm