

LED Warning Light ONN-M4K

Introduction:

1. Lamp shade adopts prism structure design, more uniform astigmatism, clearer signal display
2. Buzzer optional, volume louder than 85dB.
3. High brightness LED chip, long lifetime and low decay.
4. Foldable base is available, easy to install.
5. Pole length can be customized.

Application: CNC machine, Automatic equipment , SMT equipment etc.

Warranty: 2 years

Certification: CE, RoHS, FCC

Ordering code:


ONN - M4K <u>B</u> <u>F</u> <u>T</u> <u>RYG</u> (<u>Foldable</u>)						
	1	2	3	4	5	6
1.Model NO.	M4K					
3. Voltage	B: DC24V					
4.Function	B: Steady, F: Steady with buzzer, S: Red flash, C: Red flash with buzzer, D: All flash, E: All flash with buzzer					
5.Connect type	T: PNP& NPN					
6. Color	R: Red, Y: Yellow, G:Green					
7.Mounting type	Foldable type					

Parameter:


Power	0.72W for each color
Input voltage	DC24V
Current	30-150mA
Working Temperature	-20~45℃
IP rating	IP50
Buzzer volume	>85dB
Material	PC lens and ABS body
Lifetime	50,000 hours
Installation	Fixed by screw
Color	Red Yellow Green Blue White




Dimension(mm):

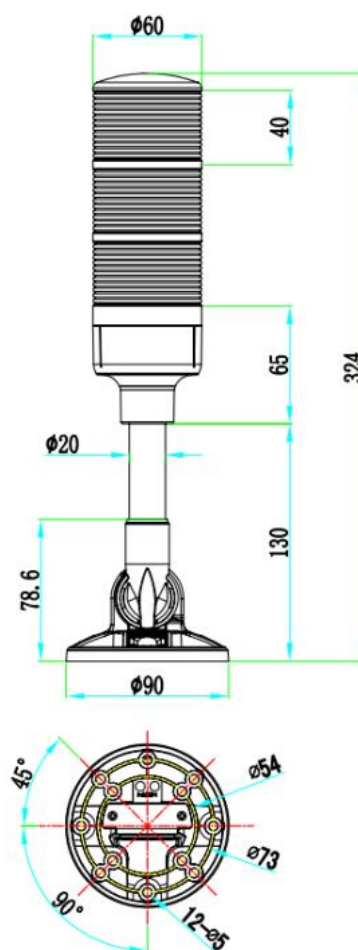

Wiring instruction:

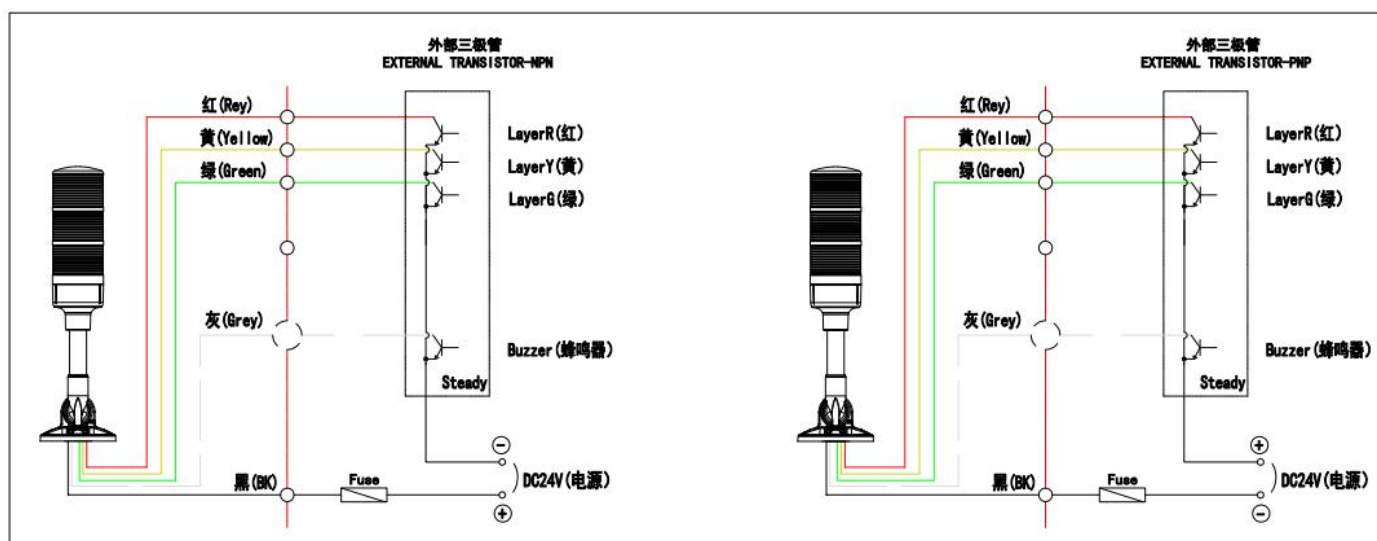

Installation dimension drawing

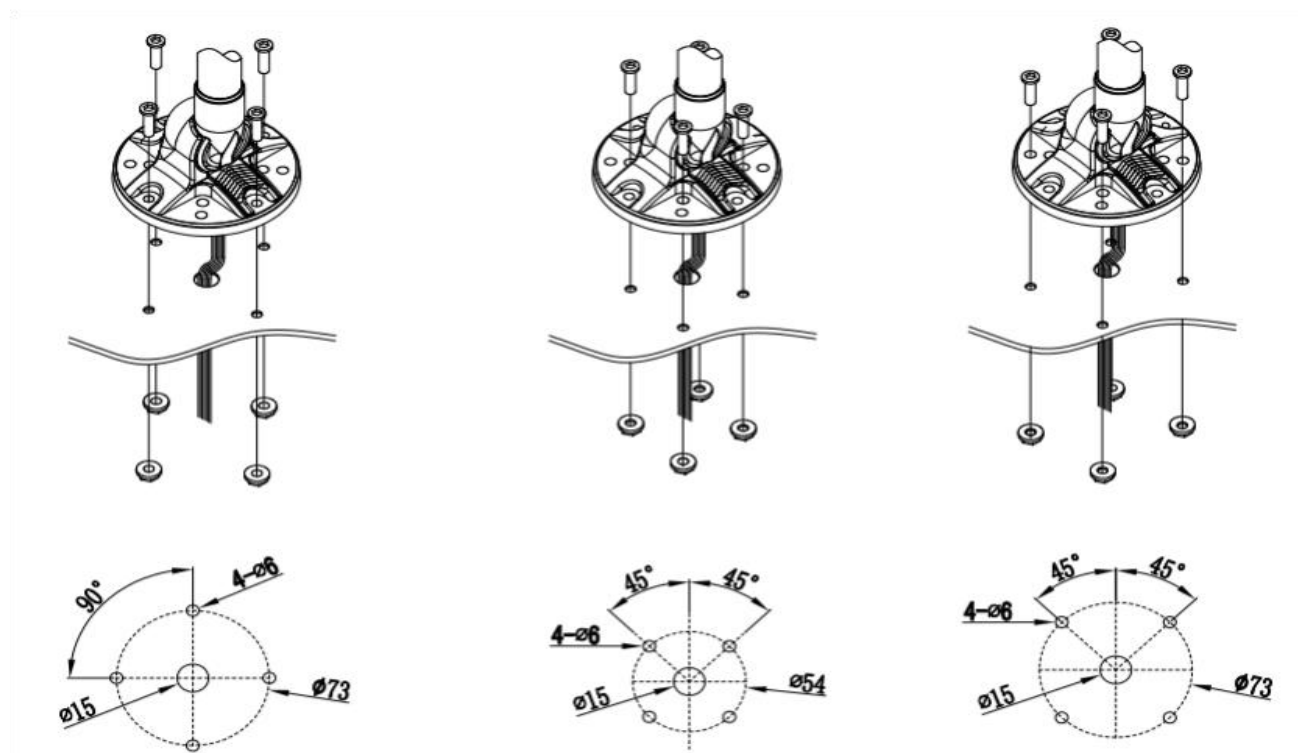


Installation method 1

Installation method 2

Installation method 3

Use of foldable base bracket:

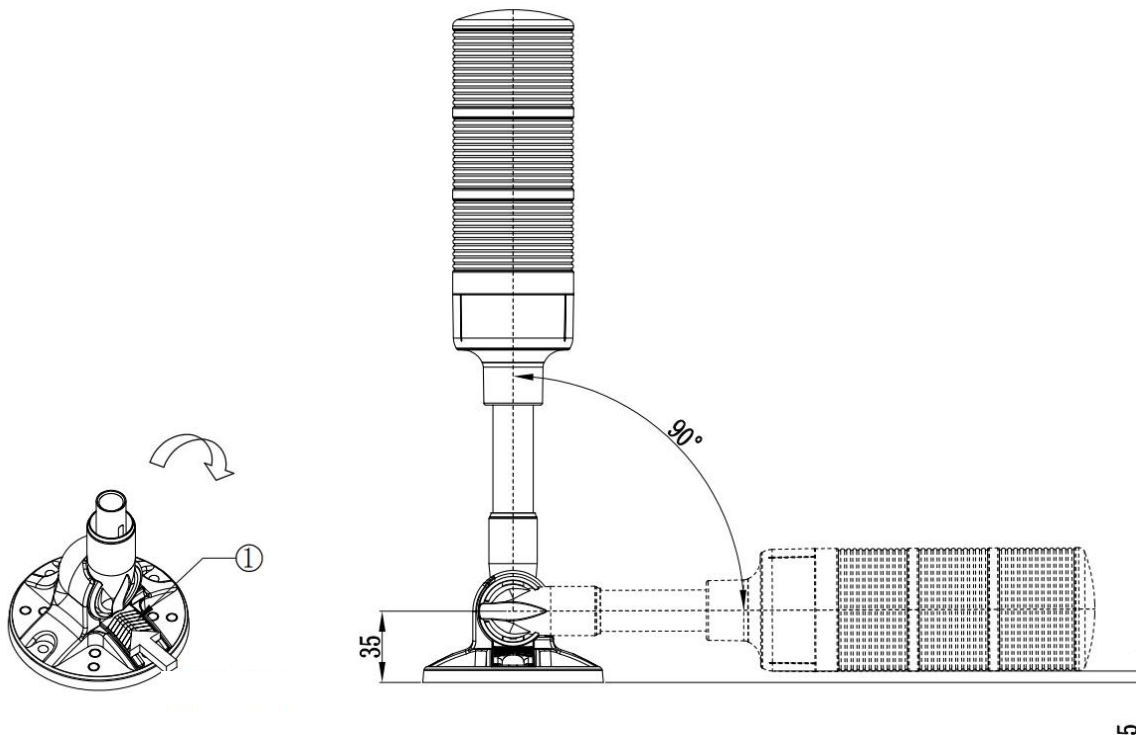

Slide and hold ① in the direction of the arrow, slowly tilt the product until the product is completely bent, and then release ① (the maximum bending angle is 90°). (As shown in the picture above)

Package info.:

Item No.	Qty/carton	Carton size	Total NW.	Total GW.
M4K	12 pieces	460*440*340mm	5kg	6.4kg

